

Fitting Instructions BWR15 & BWR15Z

WHITELINE

AUTOMOTIVE *Flat out*

PO Box 5666, Minto, NSW, 2566 Australia
Ph: 61 2 9603 0111 Fax: 61 2 9820 2500
E-mail: admin@whiteline.com.au
A.B.N. 68 073 002 034

Application:

VW Golf, 10/98 - 4/03, Mark 4.

Full kit rear swaybar to suit all vehicles, excl. 4 motion.

Always refer to current catalogue for complete application listing.

Specifications:

BWR15 - 22mm non-adjustable full kit swaybar
BWR15Z - 22mm adjustable full kit swaybar

Contents:

- 1 x Swaybar
- 2 x Chassis mount 'D' bushes 22mm centre
- 2 x 3/8" * 2 inch high tensile bolts
- 2 x 3/8" * 1.75 inch high tensile bolts
- 4 x 3/8" unc nyloc nuts
- 4 x 3/8" unc flange nuts
- 2 x U-bolts, 85*120mm
- 4 x M10 * 32mmOD washers
- 4 x M10 * 22mmOD washers
- 2 x Box section steel brackets
- 2 x 10mm steel plates.
- 2 x Double eye swaybar links (with bushes and crush tubes)
- 2 x D-bush mounting (saddle) brackets
- 1 x Grease sachet.

Fitting:

Please read complete fitting instructions and check kit components prior to fitment.

1. Raise the rear of the vehicle to gain access for the installation by the use of a drive on hoist / ramps.
2. Loosen and remove rear lower shock absorber bolts.
3. Fit new 'box' shaped brackets up to the shock absorber as shown in Fig 3 and tighten lower shock absorber bolts to OEM specifications.
4. Assemble swaybar end links using Fig.2 as a guide for washer positioning. Fit end links to 'box' shaped bracket as in Fig.3 using the 3/8" bolt (45mm long).
5. Apply grease to the inside of poly D-bushes, and fit onto the swaybar.
6. Using mounting (saddle) brackets, U-bolts, steel plates and 3/8" flange nuts, loosely fit the swaybar onto the swing arm, refer to Fig.'s 3 & 4. It is recommended to remove excess thread from U-bolts on completion of sway bar fitment.
7. Connect the links to the outside edge of the swaybar using the remaining 3/8" (50mm long) bolts, washers and nuts, refer to Fig.4. For adjustable swaybars, connect to the desired adjustment position, refer to Fig 1.
8. Tighten all nuts and bolts.
9. Check & re-tension all fittings again after 100km's but no more than 200km's.
10. For noise and friction free operation, carry out periodic inspections and maintain proper bush lubrication.

Code: Z337

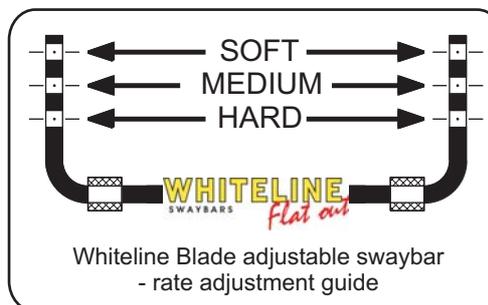


Fig. 1: Sway bar adjustment guide.

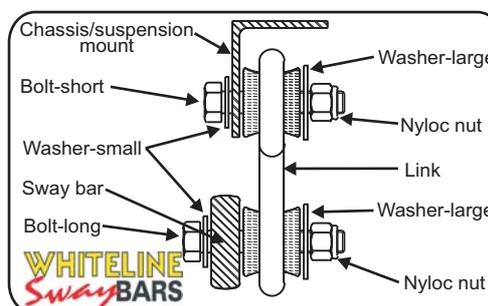


Fig. 2: Link assembly guide



Fig. 3 Left hand side swaybar link assembly

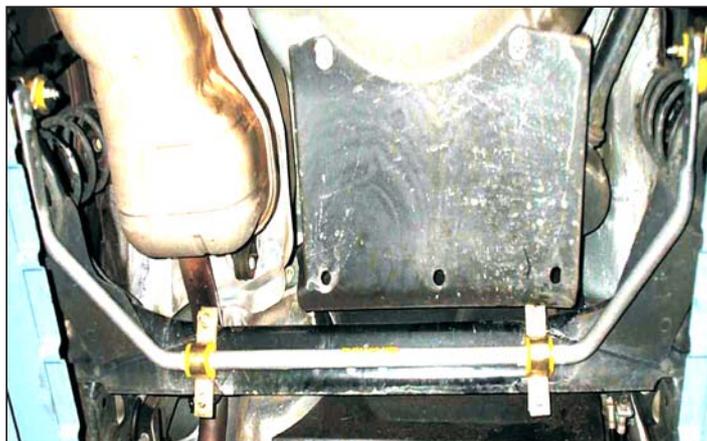


Fig. 4: Complete swaybar assembly

Warning: Please drive carefully while you accustom yourself to the changed vehicle behaviour.