

Fitting Instructions

Swaybar-h/duty Blade adjustable

Code: Z5012

Application:

Replacement kit Blade adjustable front swaybar to suit:
- **Ford Mustang 2005-2008**

Always refer to current catalogue for complete application listing.

Specifications:

32mm 4-way Blade adjustable replacement kit swaybar
(OE+0%, OE+14%, OE+32%, OE+53%)

Contents:


1 x swaybar
2 x swaybar mount D-bushes
4 x bolts M10 x 45mm long
4 x bolts M8 x 20mm long
4 x washers, M10 spring
2 x spacer brackets, alloy
2 x retaining brackets, steel
1 x grease sachet

Fitting Instructions:

Please read complete fitting instructions and check kit components prior to fitment. These instructions are to be used in conjunction with workshop manual. It is recommended that all work be carried out by a qualified technician. Installation of this product must be done at normal ride height and is best done with the vehicle on a drive-on hoist / lift or ramps.

1. Disconnect front swaybar endlinks from swaybar.
2. Undo chassis mounts, and remove swaybar.
3. Remove original chassis mount clip-in retaining nuts and discard.
4. Slide new retaining plates inside chassis bracket.
5. Position new alloy spacer blocks in place as shown in diagram below, and secure using new M8 bolts. Ensure steel dowels engage into the chassis mount. Recommended torque setting: 30Nm.
3. Apply grease to the inside of poly D-bushes and fit onto the swaybar.
4. Position swaybar in place and attach to the chassis using original mounting brackets and new M10 bolts. Recommended torque setting: 60Nm.
5. Re-attach original endlinks to the swaybar. Refer to inset diagram for swaybar adjustment guide.
6. Tighten all nuts and bolts to manufacturer's torque settings.
7. Check & re-tension all fittings again after 100km's but no more than 200km's.

For noise and friction free operation, carry out periodic inspections and maintain proper bush lubrication.

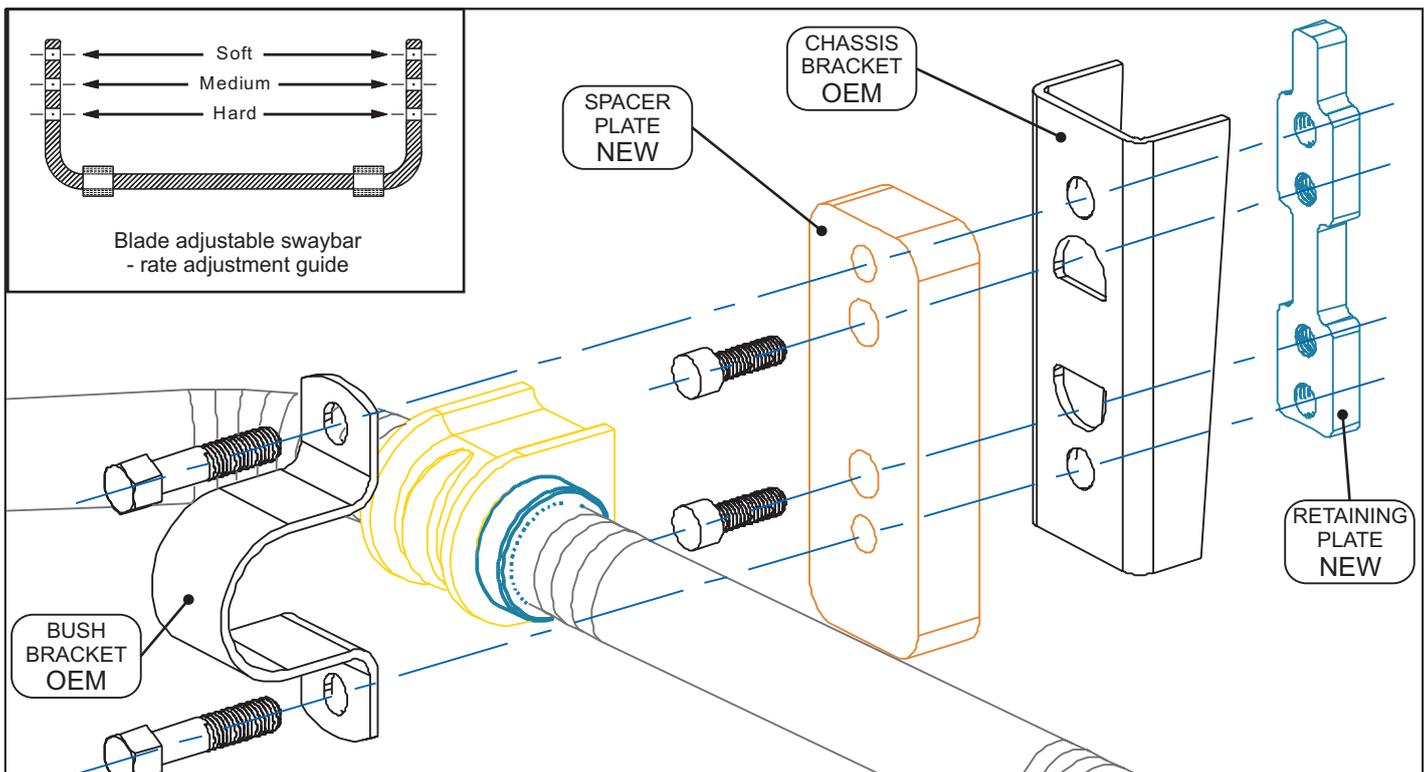

Warning: Please drive carefully while you accustom yourself to the changed vehicle behaviour.