

Installation Guide


Rear Upper Trailing Arm Pinion Angle Adjustable Bush

Z 5032

Suits: Ford Mustang 05 on

(Always refer to the current catalogue for complete application listings)

N.B: This installation guide should be used in conjunction with the workshop manual.
All fastener torque settings should be adhered to.

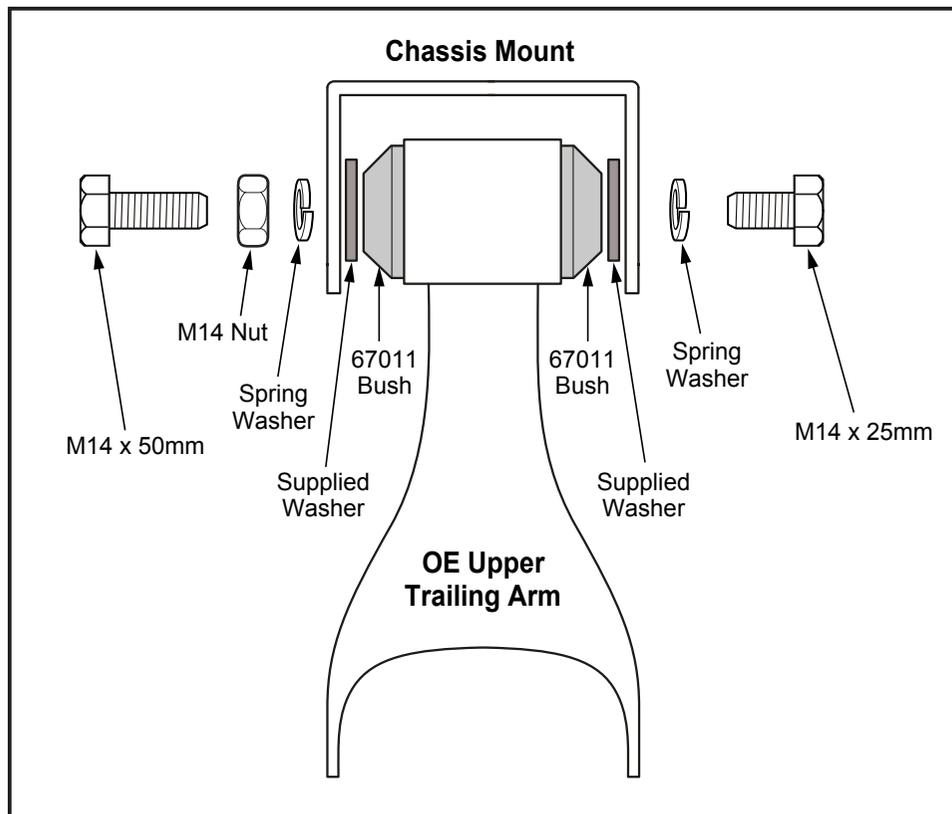

- Note:**
1. Fit the new bolts, lock washers and lock nuts to the eccentric crush tube allowing room for adjustment and fitment of spanner.
 2. Once the bolts are fitted, the longer of the two is tightened until it bottoms out in the thread. Rotate bolt clockwise to turn the eccentric crush tube to the desired angle.
 3. When the specification is reached, tighten locknut up against chassis mount to lock off adjustment.

N.B: It is recommended that a licenced workshop or trades person carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.

Installation Guide


Rear Upper Trailing Arm Pinion Angle Adjustable Bush

Z 5032

Suits: Ford Mustang 05 on

(Always refer to the current catalogue for complete application listings)

N.B: This installation guide should be used in conjunction with the workshop manual.
All fastener torque settings should be adhered to.

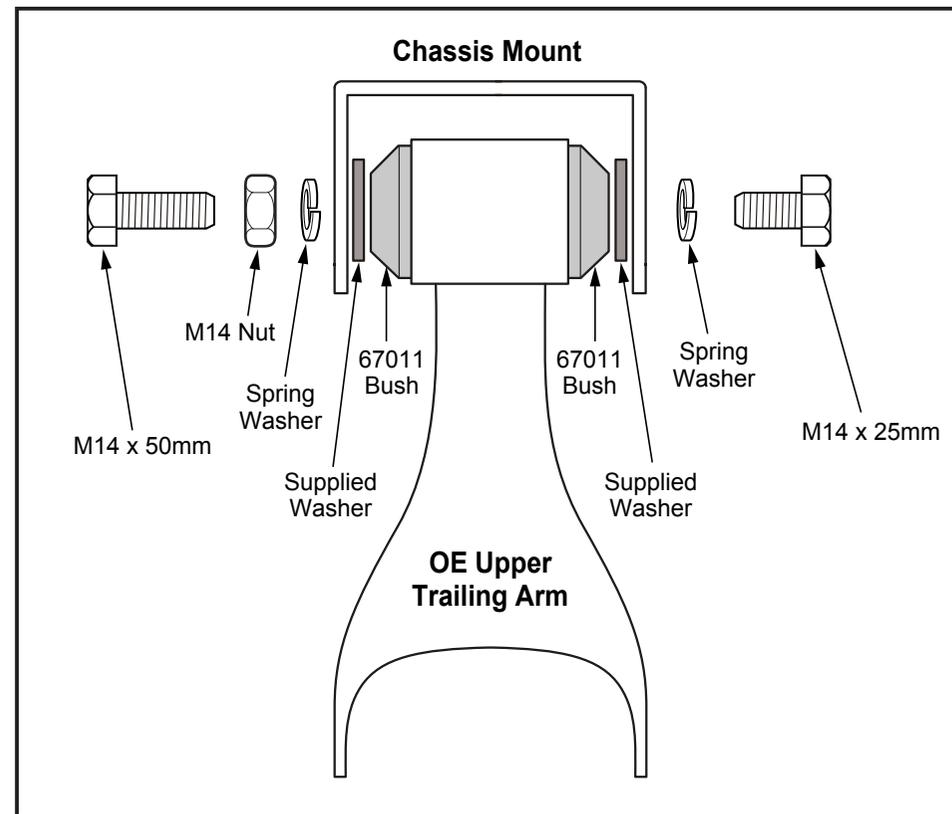

- Note:**
1. Fit the new bolts, lock washers and lock nuts to the eccentric crush tube allowing room for adjustment and fitment of spanner.
 2. Once the bolts are fitted, the longer of the two is tightened until it bottoms out in the thread. Rotate bolt clockwise to turn the eccentric crush tube to the desired angle.
 3. When the specification is reached, tighten locknut up against chassis mount to lock off adjustment.

N.B: It is recommended that a licenced workshop or trades person carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.