

Installation Instruction Sheet

KCA365


KCA365 is a rear camber adjusting kit to suit Mitsubishi Galant VR4 HG & HH 5/89 > 4/93.

It is beneficial on most standard cars, and is critical on any lowered application due to the large amount of base negative camber and the small amount of factory adjustment available. Excessive negative camber reduces acceleration and braking performance, increases tyre wear and contributes to the rear feeling "loose" and nervous when cornering.

Each kit contains 2 (4 half-bushes) bushes designed to replace rear upper control arm inner pivot bushes, with 2 off-set metal tubes for camber adjustment.

Please read complete instructions before commencing work.

1. Check wheel alignment and work out amount of change required. KCA365 kit has an adjustment range of +/-1.25 degrees.
2. Raise the vehicle, support on safety stands and remove rear road wheels.
3. Remove upper control arms.
4. This kit requires the use of the original equipment steel shell. Do not remove this shell. Original equipment rubber must first be removed.
5. Refit upper control arms, tighten and tension all mounting hardware to manufacturers specifications.
6. Refit road wheels and lower the vehicle.
7. Road test, check wheel alignment and adjust if necessary using factory adjustment.

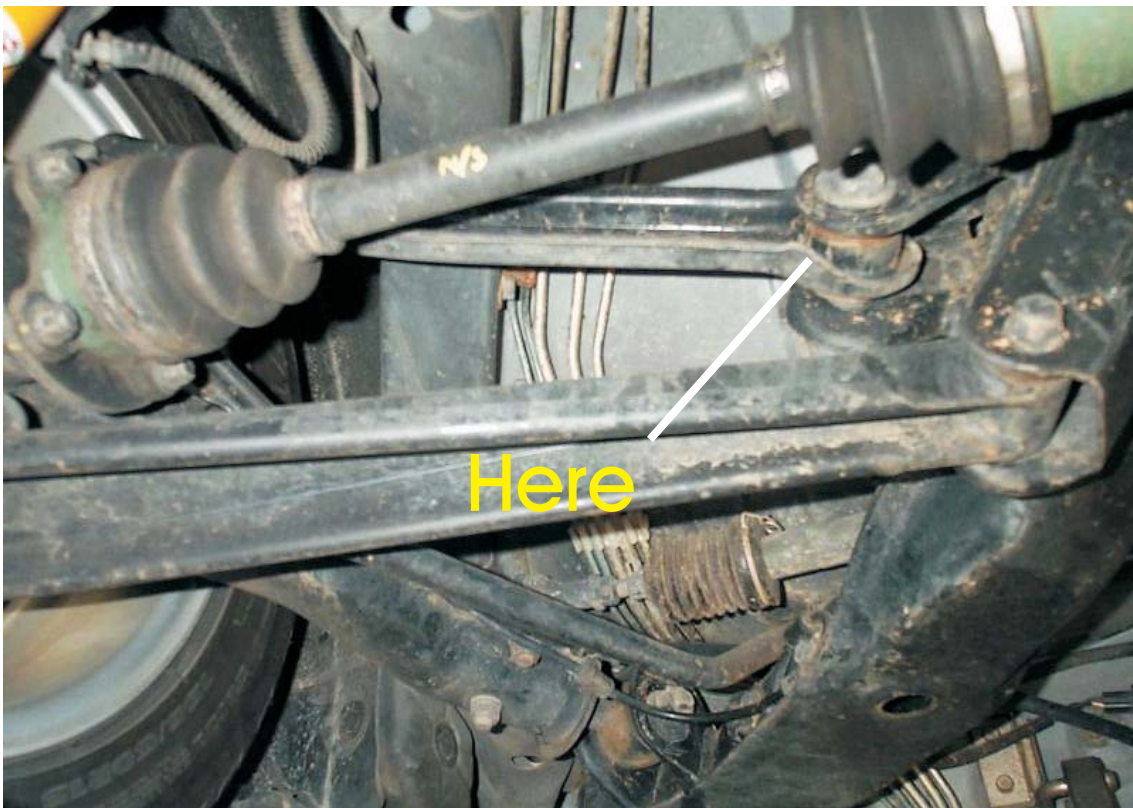

Note: Please drive carefully while you accustom yourself to the changed vehicle behaviour.

WHITELINE
Flat out
PO Box 5666, Minto, NSW, 2566 Australia
Ph: 61 2 9603 0111 Fax: 61 2 9820 2500
E-mail: admin@whiteline.com.au
A.B.N. 93 051 207 535
Code: 220